


Coaxial Circulator


P/N: ZSHX72-76-20DP300



1. Electrical Specifications

Frequency Range	72 – 76MHz
Insertion Loss	0.8dB max @ +25°C 1.0dB max @ 0°C ~ +60°C
Isolation	20dB min @ +25°C 18dB min @ 0°C ~ +60°C
VSWR	1.25 max @ +25°C 1.30 max @ 0°C ~ +60°C
Phase	±5°
Power Handling	300W
Impedance	50ohm
Connectors	TAB
RoHS Compliance	Yes

2. Mechanical Specification (for reference)

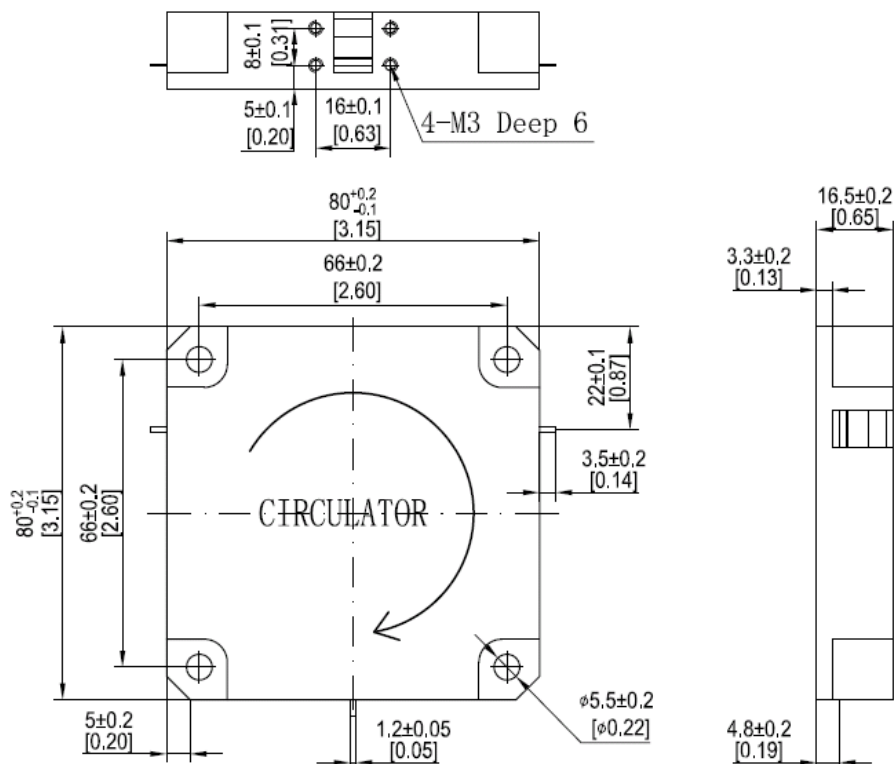

3. Test Curve

