


# 180° Hybrid

P/N: ZSDQ-180400-180K

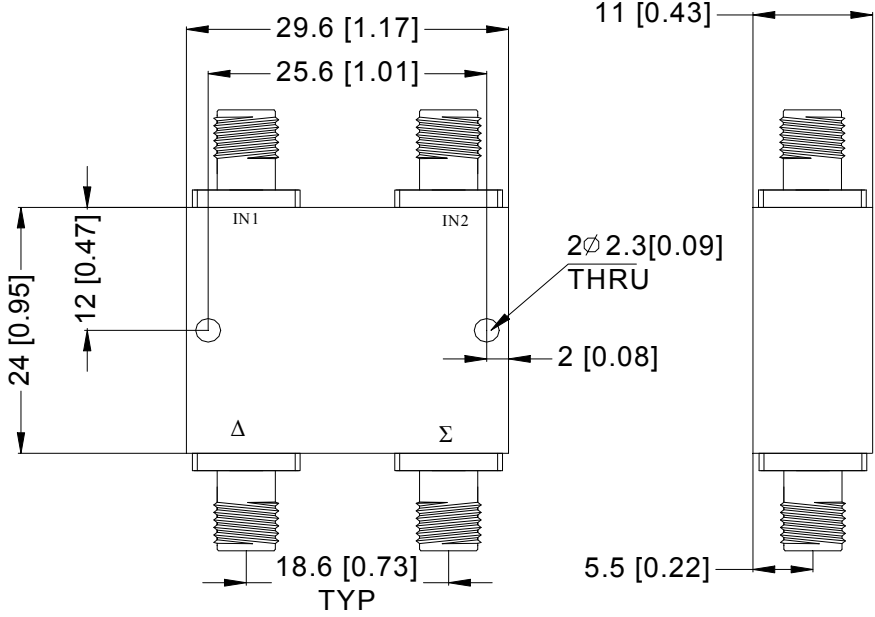

1. Electrical Specifications	
Frequency Range	18.0 – 40.0GHz
Insertion Loss	≤3.0dB
Isolation	≥12dB
Amplitude Balance	≤±1.0dB
Phase Balance	≤±12°
Input VSWR	≤1.80:1
Power Handling	Average ≤20W
Impedance	50Ω
Connectors	2.92mm-Female
Operating Temperature	-40°C ~ +70°C
RoHS Compliance	Yes
2. Mechanical Specification (for reference)	
	

26-40GHz Test Curve (just for reference)

